

Каталог

Домофонија & Видеофонија

Вашата безбедност е Наша одговорност!



















Ви нудиме

- 🗸 Автоматика на врати
- ✓ Алармни системи
- ✓ Домофонија & Видеофонија
- Противпожарни системи
- ✓ Контрола на пристап
- ✓ Озвучување на објекти
- <u>∨ Кабли и напојување</u>
- ✓ Компјутерски мрежи

078 841 602

Гаранција на производите е 12 – 24 месеци. Омен Сервис го задржува правото на промена на цените без претходна најава.





IPC Villa Do	or Station	
МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА
**************************************	DAHUA VTO2111D-P-S2 IP Villa Door Station High definition camera; WDR; Operating temperature -30°C-60°C;IP65;Supports auto IR illumination and D/N; Card/app remote/indoor monitor unlock; Supports two-way voice	C
Ш.3200	call; 10,000 cards; Tamper Alarm; Control two locks DAHUA VTO1301R-W Wi-Fi Villa Door Station Ultra slim design; PC and ABS material make it ideal for indoor and outdoor use. Offers two—way video call with indoor monitors; Video call through app; IR illumination and auto WDR; Wi-Fi connection; IP65 rated; H.264 and H.265.	C)
Ш.3203	DAHUA VTO2211G-WP IP Villa Wi-Fi Door Station Tamper alarm; Standard PoE; Control two locks; Supports wireless network; Card unlock, app unlock, and indoor monitor unlock; Two-way audio and voice call through app;Card capacity: 10,000; Thin lightweight design;	C)
0 	VTO6222E-P 2-wire IP Apartment Door Station Highly durable and elegant, it is made of aluminum panel, and has a mechanical keypad. 2MP HD camera. Supports 5,000 users and 10,000 cards. Supports multiple unlock methods including password, IC card, and unlocks remotely. Provides 12 VDC, 600 mA power. IP65 rated. IK08 rated. Standard PoE power supply.	C
————————————————————————————————————	DAHUA VTO6521H Apartment Door Station 4.3 inch IPS display; screen resolution 800×480; 2MP CMOS; true WDR; Touch button; IP65; Operating temperature: -30°C to +60°C; Auto light illumination reduces light pollution; Multiple unlock modes: Password unlock, IC card unlock, and remote unlock; Support 20,000 users and 10,000 cards	C)
ш.3206	DAHUA VTO3311Q-WP Wi-Fi Villa Door Station Full metal casing design.Customizable Number of Buttons.Wi-Fi connection. 1/2.8" 2-MP HD CMOS camera.IR illumination and auto WDR.Supports two locks.Voice call and unlocking ;through app.IK08 and IP65 rated.H.264 and H.265.Unlock with IC card.PoE power supply.Included rain cover.	C
ш.3207	VTH2421FB-P IP Indoor Monitor 7" TFT Capacitive touch screen, 1024 x 600; IPC surveillance; Alarm integration; High performance; Embedded 8GB SD card; Support standard PoE	C
ш.3208	DAHUA VTH1550CH IP Indoor Monitor 7" TFT Capacitive touch screen; IPC surveillance; Alarm integration Micro SD card optional, max 32GB; Record & Snapshot(SD card needed)	6
ш.3209	DAHUA VTH2611L-WP Dahua Wi-Fi Indoor Monitor 4.3" TFT capacitive touchscreen; Unlock the door; Set DND period; IPC surveillance; 4-channel alarm input and 1-channel alarm output; Supports standard PoE; Ethernet and Wi-Fi.	C)





ш.3210	DHI-VTH2621GW-P IP Indoor Monitor 7" TFT capacitive touch screen, 1024 × 600; 6-channel alarm input and 1-channel alarm output;Standard PoE; Outdoor station and IPC monitor; H.265 and H.264 video coding; High performance & cost-effective	C)
©iffua . Ш.3211	DAHUA VTH2621GW-WP IP Indoor Monitor 7" TFT capacitive touch screen, 1024 × 600 · 6-channel alarm input and 1-channel alarm output; Wi-Fi; Standard PoE · Door station and IPC monitor; H.265 and H.264 video decoding; High performance & cost-effective	
ш.3212	DAHUA VTH2621G-WP IP & Wi-Fi Indoor Monitor 7" TFT capacitive touch screen, 1024 × 600; 6-channel alarm input and 1-channel alarm output; Wi-Fi; Standard PoE; Door station and IPC monitor; H.265 and H.264 video decoding; High performance & cost-effective	
ш.3213	VTH5421EW-H Wi-Fi Digital Indoor Monitor with Handset 7 inch LCD, 1024 (H)×600(V); 6 alarm input ports; 1 alarm output port; 1 12V DC power output port provides power for peripheral alarm devices and sensors; 16kbps audio stream; You can answer calls hands free;	
ш.3214	DAHUA VTH5321GW-W Android 7-inch digital indoor monitor Android 8.1;More User-Friendly UI;Ethernet and Wi-Fi;7" TFT Capacitive touch Screen,1024×600;Quick configuration for villa system;	0





МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА
ш.3215	DAHUA KTX01 Video Intercom KIT 2-wire Hybrid Villa Door Station; Aluminum alloy front panel; Auto IR illumination; Video messages can be left for unanswered calls. (SD card is required for VTH); Features nameplate and DWDR; Supports local lock and second lock; Offers antitampering alarm; IP65 and IK07 rated;	C
nalogue Video	o Intercom KIT	
МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА
ш.3216	Video Intercom Kit 7" TFT screen; Video intercom function: Unlock, voice call, video call, volume adjustment; System Capacity: 2 door stations + 3 indoor monitors; Multiple bell sound; Supports digital wide dynamic range (DWDR)	6
Ш.3217	DHI-KTA04 Video Intercom Kit Video intercom function: Unlock, voice call, video call, volume adjustment and doorway monitoring · Multiple bell sounds · Support digital wide dynamic range (DWDR); Display 4.3" TF	C)






Wired Apartm	ent Outdoor Station	
МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА
ш.3318	DHI-VTO1210C-X IP&Analog Apartment Outdoor Station; 1.3MP CMOS camera, H:75° 3" STN LCD screen, phonebook; Stainless steel panel, IP54,IK07 Night vision & Approaching induction; Video & Audio messaging Surface & Flush mounted	
ш.3219	DHI-VTH1200DS 4.3" Analog Indoor Monitor; 4.3" TFT LCD screen Color video & audio intercom; Alarm intergration Sufrace & Flush mounted	
ш.3220	DHI-VTH2020A 7" Analog Indoor Monitor; 7" TFT LCD screen Color video & audio intercom; Alarm intergration Surface mounted	C
Ш.3221	DHI-VTNA1040B 4ch Analog Distributor;4ch distributor 30 cascading;Used in Analog apartment systemDC24V, Max 20W	C
Ш.3222	VTNS1060A Network power supply for IP System; Decent appearance Protocol network power supply switch; Connect max 6 indoor monitors with the Cat 5e cable,	C
ш.3223	ADS-65LSI-19-1 DC 24V 2.5A Power Supply Input: 100-240V ~50/60Hz Required for the VTNA 1040B Switch	C
ш.3224	DH-PFM321D-EN DC12V 1A Power Adapter _ Dahua brand, European standardInput 100~240V, 50/60Hz, 0.5A Output 12V (+7%, -3%)1A (2%)	C





Analogue Kit 7"		
МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА СО ДДВ
	VDO11 (COLOR) Multi-Video Door Phone for Villa Can support 2, 3, 4, 5 indoor monitors 2 indoor monitor connection, Unit weight: 0.76kg; Box size: 14*5*28.5cm; 3 indoor monitor connection, Unit weight: 0.77kg; Box size: 14*5*28.5cm; 4 indoor monitor connection, Unit weight: 0.77kg; Box size: 14*5*28.5cm;	C)
	M-VDO1-2ID - Support ID card Function 2 indoor monitor connection +ID Villa Door Phone Outdoor Station with Support ID card Function 700TVL CMOS Camera, 3.6mm Lens; 5 IR LEDs, night IR distance: 2m;	



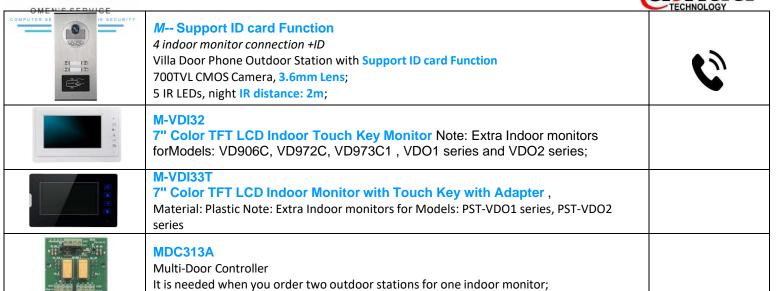





WIRED VIDE	O DOORPHONES FOR BUILDINGS	
МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА СО ДДВ
	M-ADO500 2 Wire Audio Door Phone Outdoor Station - Support Unlocking - Support Intercom - Material: Metal - Shell size: 273*130*50mm - ID card function	6
	M-ADI02 2 wire Audio Indoor phone - Support Unlocking - Support Intercom - Material: Plastic- Shell size: 203*89*63mm	C)
	M-ADI03 2 wire Handsfree Audio Indoor phone - Support Unlocking - Shell size: 110*86*23mm - Must work with decoder PST-ADD04 together	
	M-ADD04 4CH Audio Indoor phone Decoder - Support 4pcs indoor phone - Material: Plastic - Shell size: 86*86*30mm	
を 中方3 京を で では が で は が に に に に に に に に に に に に に に に に に に	M-ADP12 Power Supply - DC12V - Material: Metal - Shell size: 200*180*70mm One system only need buy one power supply for the outdoorstation + allindoor phones;	6
	2VD58L - Digital Non-Video DoorPhone Outdoor Station - It is suitable for 1-9 floors buildings; - In total it suppots 1-64PCS VD504N-M indoor phone;	6
	VD401 (Power Supply) - Output Voltage: DC12V - Output Max. Currunt: 1500mA - Working voltage: Option - Environmental temperature: -30°C-55°C - Dimension: 205*165*75mm	C)
FARFISA		
МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ FARFISA KIT 4V Позив со 4 дугмиња Kit For Multy-Way audio systems -RP series push-button panel; -PT524SW intercom -Power supply PRS220; Input: 127 or 220-230VAC	ЦЕНА СО ДДВ
000	FARFISA KIT 2V Позив со 2 дугмиња Kit For Multy-Way audio systems -RP series push-button panel; -PT524SW intercom -Power supply PRS220; Input: 127 or 220-230VAC	6





WIRED VIDEO DOORPHONES FOR BUILDINGS		
МОДЕЛ	КАРАКТЕРИСТИКИ И СПЕЦИФИКАЦИИ	ЦЕНА СО ДДВ
	VD5E Color Video Outdoor Phone - ID card function- Can connect in total 999 users; - Need 1 power supply - Aluminium alloy- Color CCD IR night view- LED display - Unlock with password or ID/IC card Embedded in wall or door Video intercom with indoor phone,management center	
	IDM04 4" Color Handfree Indoor Phone - Plastic plate, mini-appearance - 4-inch TFT Emvironment temprature: —10~+70°C - 16-chord ring, 30seconds for ringing Wall-mount installation - Per 16 pcs. need 1 power supply	
Pal	IDM07T 7" Touch-Button Color Handfree Indoor Phone - Acrylic Panel- 7-inch TFT- Touch-button - 16-chord ring, 30seconds for ringing - Function: video intercom, long-distance unlocking and surveillance - Per 16 pcs. need 1 power supply	
	ID5EN - Indoor Phone - Per 16 pcs. need 1 power supply	
- Marie Annual	VDPS3 Power Supply - Output: DC35V/1.4A - Input: AC180~270V 50~60HZ - Environmental temperature: -25°C+70°C Environmental humidity: 10%~95%.	C
damage de la constante de la c	 VDDA4 -Decodering Amplifier - Max capacity:4 indoor phones Random coding based on room numbers. - Working voltage:3035V - Static state current:≤15mA - Signal decoded and video amplification are unified. 	6
· manual · · ·	VDDA8- Decodering Amplifier - Max capacity:8 indoor phones Random coding based on room numbers. -Working voltage:3035V - Static state current:≤15mA - Signal decoded and video amplification are unified.	C)
	VD603B (B&W) - Digital ID card B/W video Outdoor Station: - Waterproof and aluminum alloy - Room NO. display - Intercommunication is available - Monitor the outside for property and safety - Password can release the door - External dimension: 358*123mm	
	VD603C (COLOR) - Digital ID card B/W video Outdoor Station: - Waterproof and aluminum alloy - Room NO. display - Intercommunication is available - Monitor the outside for property and safety - Password can release the door - External dimension: 358*123mm	





	VD201 (Decoding Amplifier) - Signal decoding and video amplification are unified - Max capacity: 4 indoor phones - Supply voltage: DC12V/18V - Static current: 30Ma - External dimension: 86*170*40mm	6
4/4/	VD402 (Power Supply) - Output Voltage: DC18V - Output Max. Currunt: 3500mA - Working voltage: Option - Environmental temperature: -30°C-55°C - Dimension: 250*167*87mm	6